

Operating and monitoring systems

Thin Client SERIES 500
Device platform MANTA
OS ET-577-TX

STAHL




- Thin Client Operator Station, 24" display, Full HD 1920 x 1080
- Zone 1, 2, 21, 22, stainless steel enclosure IP66, optional acc. to GMP
- Optional resistive glass or foil touch screen
- Data is transmitted via Ethernet as 10/100Base-TX via CAT7 up to 100 m

WebCode **ET577A**



The OS ET-577 HMI series includes Thin Client Operator Stations for zones 1, 2, 21, 22 and Division 2. Their brilliant 24" widescreen displays with a resolution of 1920 x 1080 pixels (format 16:9), and are available with or without touch screen. The stainless steel enclosures (SS304 or SS316L) are available with a front opening or in cleanroom-compliant design and with different mounting options. Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data is transmitted via Ethernet as 10/100Base-TX via CAT7 up to 100 m.

THIN CLIENT INTEGRATION

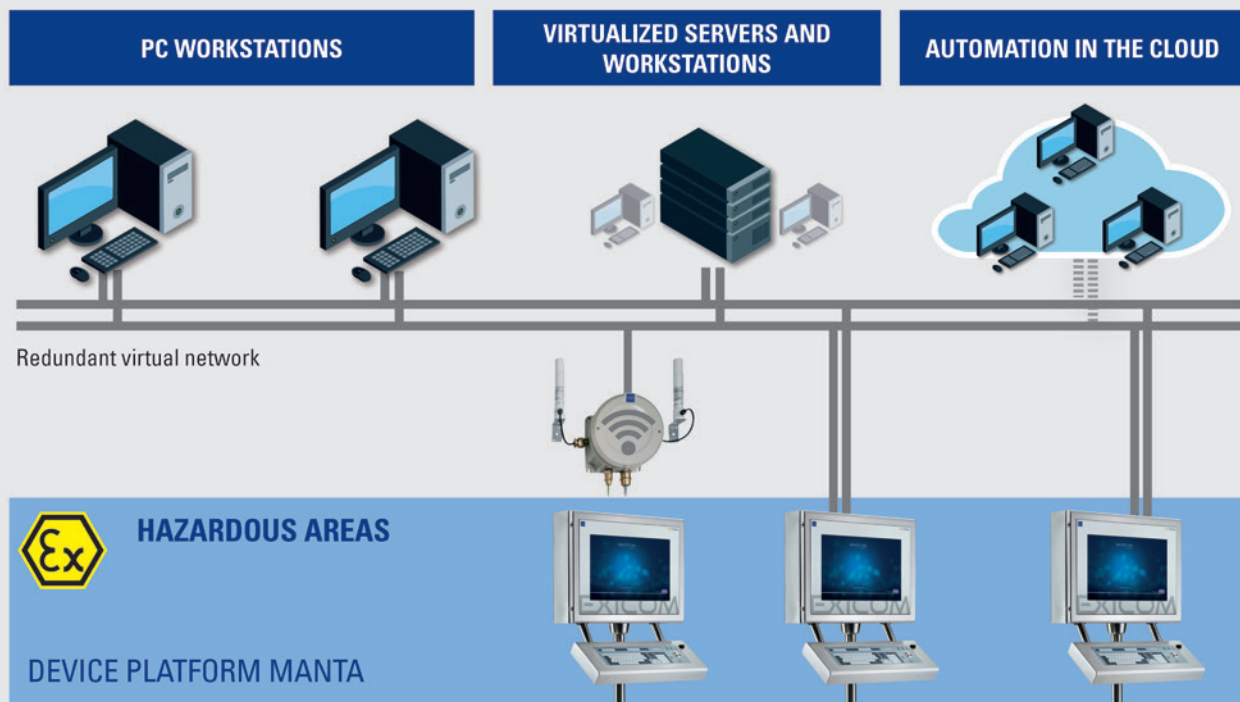

Operating and monitoring systems

Thin Client SERIES 500
Device platform MANTA
OS ET-577-TX

STAHL

Technical Data

General

Series	Operator Station OS ET-577
Product description	24" Thin Client
Technology	Remote HMI Thin Client
HMI type	Operator Station
WebCode	ET577A

Explosion Protection

Application range (zones)	1 2 21 22
Application range (divisions)	Class I, Division 2
Certifications	ATEX, IECEx, EAC, NEC, CEC, PESO, KGS, RCM
IECEx certification	IECEx BVS 11.0075X
ATEX certification	BVS 11 ATEX E 102 X
EAC certification	TC RU C-DE.HA91.B.00145/20
NEC certification	70011698
CEC certification	70011698
KGS certification	12-GA4BO-0617X
Notice certification	The certificates and explosion protection markings apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these.
IECEx gas explosion protection	Ex eb q [ia op is Ga] IIC T4 Gb
IECEx dust explosion protection	Ex tb IIIC [ia op is Da] IP65 T110°C Db
ATEX gas explosion protection	II 2(1) G Ex eb q [ia op is Ga] IIC T4 Gb
ATEX dust explosion protection	II 2(1) D Ex tb IIIC [ia op is Da] IP65 T110°C Db
EAC gas explosion protection	1Ex e q [ia op is Ga] IIC T4 Gb X
EAC dust explosion protection	Ex tb IIIC [ia op is Da] T110°C Db X
NEC explosion protection	Class I, Zone 1 AEx e q [ia] IIC T4 Gb
CEC explosion protection	Ex e q [ia] IIC T4 Gb Class I, Division 2
KGS explosion protection	Ex e q IIC T4 Ex tb IIIC IP64 T110°C Ex ia IIC T4 Ex ia IIIB T110°C

Electrical Data

Rated operational voltage DC	24 V
Voltage range DC	20 – 30 V
Rated operational voltage AC	230 V
Voltage range AC	100 – 240 V
Frequency range	50 – 60 Hz
Power consumption DC	3 A
Power consumption AC 1	1 A
Protection fuse DC	5 AT
Protection fuse AC	5 AT

Operating and monitoring systems

Thin Client SERIES 500 Device platform MANTA OS ET-577-TX

Electrical Data

Rated operational power	typ. 50 W / 100 W with O30 / max. 150 W (typ. 170 BTU / 341 BTU with O30 / max. 510 BTU)
Processor type	ATOM E3845
Processor details	Intel Bay Trail (BT); 1.91 GHz; quad core
RAM	4 GB
Data memory	64 GB MLC 128 GB MLC
Graphics controller	integrated Intel Gen. 7 HD Graphics
Memory technology	SSD solid state flash drive M.2
Operating system	Windows 10 IoT Enterprise
Language support	via operating system
Image	Remote Firmware
Ethernet / Data	10/100Base-TX (Ex e)
Data cable	CAT7 installation cable AWG23
Data cable length	max. 100 m
Interface medium	CAT7 data transmission
Interface USB	2 x USB (Ex ia) 1 x USB (Ex e) 2 x USB (Ex ia) (keyboard, pointing device)
Interface serial	1 x RS-232 (Ex e)
Interface audio	1 x Audio line out (Ex e)
WLAN	optional via USB
Connection compartment	Power supply direct in integrated Ex e connection box
Connections	via screw terminals, green
Voltage output	12 V DC, max. 500 mA
Wiring	flexible cable up to 2.5 mm ² (AWG14) fixed cable up to 4 mm ² (AWG12)
Max. input voltage U _m	250 VAC
Audio sound	optional: Audio amplifier (mono amplifier) 3.5 W, for 2x loudspeaker connection (Ex e)
Real-time clock	Yes
Real-time clock data buffer	Lithium battery and capacitor buffered, maintenance-free
Battery buffered	> 5 years
Capacitor buffered	at least 4 days

Display

Display version	TFT Colour display
Display version 2	16.7 million colours
Display size inch	24
Display size centimetres	61
Display resolution	Full HD
Total pixels	1920 x 1080
Display dimensions	16:9
Display brightness	300 cd/m ²
Display contrast	1000:1
Display viewing angle horizontal	178° at CR ≥5
Display viewing angle vertical	170° at CR ≥5
Display	Glass

Operating and monitoring systems

Thin Client SERIES 500
Device platform MANTA
OS ET-577-TX

STAHL

Display

Touchscreen	Optional resistive
Touchscreen technology	5-wire glass or membrane touch
Touchscreen activation	Foil touch: low activation pressure (0.1 up to max. 1 N) Glass touch: medium activation pressure (1.8 up to max. 2.5 N)
Touchscreen input method	Finger, gloved finger or stylus
Touchscreen durability	Foil touch: Polyester foil is easily scratched, with high pressure force the spacer dots could be damaged. Glass touch: Quite good, but with high pressure force the spacer dots could be damaged.
Touch screen scratch hardness MoHS	Foil touch: - Glass touch: >5
Touchscreen scratch hardness pencil test ISO15184	Foil touch: 3H Glass touch: 9H
Touchscreen transmissivity / optic	Foil touch: small milky effect due to the foil Glass touch: very good
Touchscreen surface contaminants	unaffected
Touchscreen abrasive resistance	36 million times with a silicone rubber of R8 finger, hitting rate 250 g at 2 times per second
Backlight	LED Technology
Backlight service life	50 000 h at +20 °C
Front plate (display)	Aluminium

Ambient Conditions

Ambient temperature operation	-20 °C ... +55 °C
Ambient temperature operation 1	-30 °C ... +55 °C with heater version O30
Storage temperature	-30 °C ... +70 °C
Cold start temperature	-10 °C
Temperature note 1	The O30 version is only available for the AC version devices !
Temperature note 2	Operating temperature +55 °C for a maximum of 5 h, for constant operation (24/7) +50 °C.
Temperature note 3	Cold start temperature: If the HMI device is switched on at a temperature below -10 °C the display will need a certain amount of time to warm up until everything is clearly visible. Depending on how low the temperature is, this process may last up to 3 hours.
Temperature note general	The temperature details apply to a standard device combination with display, keyboard and enclosure. Any additional built-in or added components may have an impact on / change these.
Heat dissipation	about 40 % via the front plate and 60 % via the enclosure
Relative humidity	10 to 90 % at +40 °C, non-condensing
Damp heat cyclic	+55 °C (±2 °C) ≥95 % (only device with glass touch (TG))
Dry heat	+65 °C
Vibration sinus	5 to 13.2 Hz: ±1 mm 13.2 to 100 Hz: ±0.7 g Change cycle 1 oct/min Axis X, Y, Z
Vibration sinus 1	71.7 to 79.2 Hz: ±0.7 g 120 min. Change cycle 1 oct/min Axis X
Vibration sinus 2	30 Hz: ±0.7 g 90 min. Change cycle 1 oct/min Axis Y, Z

Operating and monitoring systems

Thin Client SERIES 500
Device platform MANTA
OS ET-577-TX

STAHL

Mechanical Data

Dimensions (WxHxD)	740 mm x 872 mm x 400 mm
Weight	64.5 kg
Material front	Aluminium / stainless steel
Material back	Stainless steel
Ingress protection	IP66
Breather	optional
Keyboard note	With a keyboard with trackball, the operator station's ingress protection is reduced to IP54, when the trackball is moved.
Mechanical data note	The mechanical data apply to an FR enclosure with display and keyboard. Other enclosure types as well as any additional built-in or added components may have an impact on / change these.

Mounting / Installation

Enclosure type	Stainless steel enclosure (FR) optional clean room (CFR)
Mounting option	Wall, elbow, stand

Components

Keyboard	optional, 107 keys with trackball / joystick / mouse / touchpad (Ex ia)
----------	---

Accessories

KB2-x-HSG-x-M01-x

Art. No.



KB2-x-HSG-x-M01-x

Keyboard KB2 in stainless steel enclosure for SERIES MANTA
Variant for FR / CFR enclosure
Supply and connection via USB interface
Enclosure protection: IP66
Operating temperature range: -40 ° C ... +70 ° C
Optional equipment:
Enclosure material: V2A (SS304, 1.4301) or V4A (SS316L, 1.4404)
Keyboard layout: German (QWERTZ), American (QWERTY), French (AZERTY), Spanish, Swiss German, Danish, Swedish, Slovenian, Japanese
Pointing device: trackball, touchpad, or joystick
Enclosure option: additional installation of UB03-*

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.